

Click Here For

# Quick Navigating Tips


To Find Your  
Products  
***FASTER***

or

Click Here  
To Enter

# Teltek's Marker Product Index

# Navigating Teltek's Catalog in Acrobat Reader

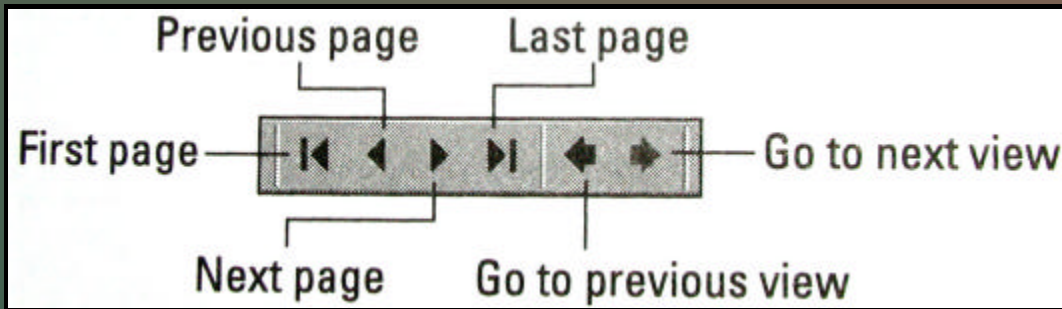

To **View Your Product Choice** in the Detailed Index:  
Click on this Hand to Choose,  
Then Click the Text to See the Product


To **View the Text Larger**:

Click on the Magnifying Glass to Zoom In



For **Additional Product Navigation**:

Click on this Bookmark Icon Above and Select Bookmarks,  
A Table of Contents will Appear

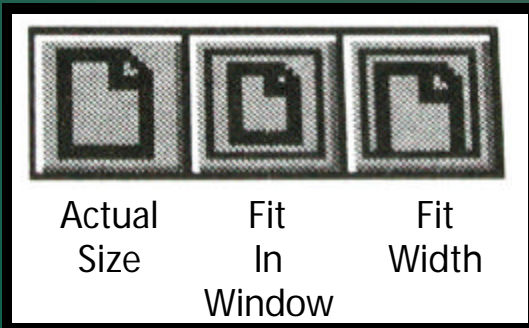

**Get Started!**  
**Click Here**  
**for the *Detailed***  
***Product Index***

# Teltek Marker Detailed Index

<b>Markers</b> .....	255-259
Underground/Overhead Fade Proof Tags .....	255
Wrap Around Markers .....	255
Weatherproof Self-Sealing Tags .....	256
U-Posts .....	257
Fiberglass Utiposts .....	257
Curb Markers .....	258
Flush-Mounted Markers .....	258
Double Barb Flush Mount .....	258
Reel Markers .....	259
Numbers/Letters .....	259



***Get Started on Teltek's Marker Section***

Underground Life Expectancy  
20 Years Minimum



Part No.	Color	Hole Diameter
T1530W2-O	White	1/4"
T1530O2-O	Orange	1/4"
T1530Y2-O	Yellow	1/4"

## Underground/Overhead Fade Proof Tags

### Applications

Marking underground and/or overhead cable, splices, droplines and equipment. Package includes 100 tags, 100 8" black UV ties and 1 Sharpie fine point pen.

### Material Composition

Base: FR Grade Lexan Polycarbonate .025"  
Cover: PVF UV Filtering Cover

Underground Life Expectancy  
20 Years Minimum

## Underground/Overhead Fade Proof Tags

### Applications

Marking underground and/or overhead cable, splices, droplines and equipment. Package includes 100 tags, 100 8" black UV ties and 1 Sharpie fine point pen.

### Material Composition

Base: FR Grade Lexan Polycarbonate .020"  
Cover: PVF UV Filtering Cover



Part No.	Color	Hole Diameter
T2025W2-O	White	1/4"
T2025O2-O	Orange	1/4"
T2025Y2-O	Yellow	1/4"

Underground Life Expectancy - 20 Years Minimum  
Overhead Life Expectancy - 15-20 Years

## Wrap Around Markers

### Applications

Mark overhead or underground fiber optic cables.

### Material Composition

Base: PVC with UV & Fungus Inhibitors, .025"  
Ink: Screen with Automotive Grade Pigments



Part No.	Color	Diameter	Width	Units Per Package
T7080-CFO	black on orange	.875"-2"	7"	50
T4040-CFO	black on orange	1.25" & smaller	4"	100

Underground Life Expectancy  
20 Years Minimum

## Weatherproof Self-Sealing Tag For Underground Use Only 2 Holes, 2-1/2" x 2"

### Applications

Marking underground cable, splices, droplines and equipment. Package includes 100 tags plus 100 8" black UV tie wraps and 1 Sharpie fine point pen.

### Material Composition

Base: PVC with Fungus Inhibitors, .035"

Cover: Clear Mylar-Polyester, .003"



Part No.	Color	Hole Diameter
T2025W2	White	1/4"
T2025B2	Blue	1/4"
T2025O2	Orange	1/4"
T2025R2	Red	1/4"
T2025G2	Green	1/4"
T2025Y2	Yellow	1/4"

Underground Life Expectancy  
20 Years Minimum



## Weatherproof Self-Sealing Tag For Underground Use Only 1 Hole, 1-1/2" x 3"

### Applications

Marking underground cable, splices, droplines and equipment. Package includes 100 tags plus 100 8" black UV tie wraps and 1 Sharpie fine point pen.

### Material Composition

Base: PVC with Fungus Inhibitors, .025"

Cover: Clear Mylar-Polyester, .003"

Part No.	Color	Hole Diameter
T1530W1	White	1/4"
T1530B1	Blue	1/4"
T1530O1	Orange	1/4"
T1530R1	Red	1/4"
T1530G1	Green	1/4"
T1530Y1	Yellow	1/4"

Underground Life Expectancy  
20 Years Minimum

## Weatherproof Self-Sealing Tag: 6 Holes For Underground Use Only 2" x 3-1/2" at widest curve point

### Applications

Marking underground cable, splices, droplines and equipment. Package includes 100 tags plus 200 8" black UV tie wraps, 1 Sharpie fine point pen.

### Material Composition

Base: PVC with Fungus Inhibitors, .020"

Cover: Clear Mylar-Polyester, .003"



Part No.	Color
T1833Y65	Yellow
T1833W65	White
T1833O65	Orange

Also Available  
in An Overhead  
Version

Return to Index

## Outdoor Life Expectancy

25 Years



Front Side



Back Side

## U POST

### Applications

Marking underground lines.  
Professional looking non-splinter, high strength polycarbonate.

- Non-rusting
- Unbreakable
- Service temperature range: -60° - +225°F
- Improved aesthetics
- Lower installation time
- Vandal resistant
- No scrap metal value

### Material Composition

Weatherproof, glass reinforced polycarbonate.  
Flexibility: Winged X design permits 90° flex, unbreakable.  
1 Sign: 2.875" x 11" black on color coded vinyl, graphics per specification.  
Packaging: Cartons or bulk on pallets  
Installation: Post drive part # U164

## Fiberglass Utipost

### Applications

Marking underground lines.

### Material Composition

Two-Sided Fiberglass Post  
Flexibility: I beam construction resists breakup  
2 Signs: 2.875" x 11" black on color coded vinyl, graphics per specification.  
Packaging: Cartons or bulk on pallets  
Installation: Post drive part #U164

## UPOST

Part No.	Size	Color
U-1248-Red	48"*	Red
U-1248-Orange	48"	Orange
U-1248-Yellow	48"	Yellow
U-1248-Green	48"	Green
U-1248-Blue	48"	Blue
U-1248-Brown	48"	Brown
U-1248-Clear	48"	Clear
U-1248-White	48"	White
U-1260-Red	60"*	Red
U-1260-Orange	60"	Orange
U-1260-Yellow	60"	Yellow
U-1260-Green	60"	Green
U-1260-Blue	60"*	Blue
U-1260-Brown	60"	Brown
U-1260-Clear	60"	Clear
U-1260-White	60"	White
U-1266-Red	66"	Red
U-1266-Orange	66"	Orange
U-1266-Yellow	66"	Yellow
U-1266-Green	66"	Green
U-1266-Blue	66"	Blue
U-1266-Brown	66"	Brown
U-1266-Clear	66"	Clear
U-1266-White	66"	White

\*Special Order Item

## Fiberglass Utipost

Part No.	Color	Length	Width
T66FO	Orange	66"	3 3/4"
T72FO	Orange	72"	3 3/4"

\*1 or 2 labels available



Outdoor Life Expectancy  
20 Years

## Curb Markers

### Applications

Self-adhesive markers for marking underground cables on streets, sidewalks and curbs.

### Material Composition

Base: XL Grade Lexan Polycarbonate, .025"

Ink: Screen Subsurface with Automotive Grade Pigment

Part No.	Diameter	Color
T2020-O	2"	Black on orange
T3030-O	3"	Black on orange
T4040-O	4"	Black on orange



Outdoor Life Expectancy  
20 Years



## Flush-Mounted Markers

### Applications

These tough, dependable markers are an excellent option for long-term field marking, no matter what the conditions.

- Mount level with the soil - drive it into the ground and it will stay due to the patented, "flared" 12.5" (310 mm) stake design.
- The markers are reversed-printed polycarbonate, so the ink cannot be scratched off the exterior sign surface. It is ultra-violet, moisture, and chemical resistant (will not corrode).
- Can be mowed or driven over.
- Custom printing is inexpensive and quick.
- Other sizes and shapes can be made easily, and an unlimited variety of colors and artwork layouts are available.

### Material Composition

Stake: Black Polyethylene

Base: XL Grade Lexan Polycarbonate

Ink: Screen Subsurface with Automotive Grade Pigment

Part No.	Marker Size	Post
FMM-6	6" diameter	12.5"
FMM-8	8" diameter	12.5"
FMM-10	10" diameter	12.5"

Outdoor Life Expectancy  
20 Years

## Double Barb Flush Mount

### Applications

Dual polycarbonate barbs create added resistance, preventing marker removal from the ground. Flush display allows for maximum display without creating an above-ground obstacle. Custom Graphics Available flush, subsurface printed display.

### Material Composition

Base: Unbreakable UV XL Grade Polycarbonate, .125"

Ink: Screen Subsurface with Automotive Grade Pigment



Part No.	Legend	Pullout-Proof Legs	Quantity per Package
T42613-FM	3"x5"	8"	10

[Return to Index](#)

Life Expectancy  
Life of the Reel



## Reel Markers

### Applications

Self-adhesive tags indoor/outdoor reels.

4" x 6-1/2"

### Material Composition

Base: Dead Soft Aluminum, .005"

Ink: Screen with Automotive Grade Pigments

Adhesive: Hi-tack 3M Acrylic, .007"

*Custom Print*  
Tags, Labels and Signs Available  
Call Your Teltek Inside Sales Coordinator  
For More Information  
888-835-8351

Outdoor Life Expectancy  
25 Years

## Numbers & Letters

### Applications



3M Scotchlite™ reflective sheeting numbers and letters are self-adhesive for indoor and outdoor marking.

### Material Composition

Base: 3M Road Sign Grade Reflective

Ink: Screen with Automotive Grade Pigment

Adhesive: Permanent Acrylic, .001"

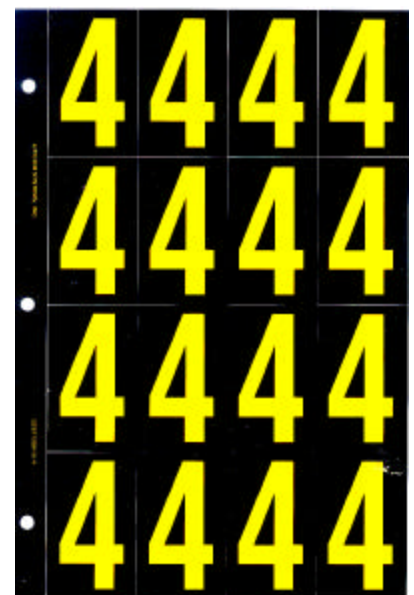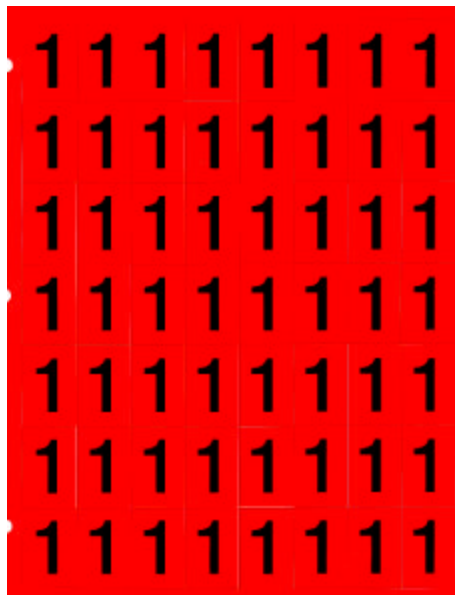

Part #	Height	Width	Letter Height	Color	Quantity
13AO	1 1/2"	1"	1"	Black on Orange	25/bag
13AY	1 1/2"	1"	1"	Yellow on Black	25/bag
13BO	2 7/8"	1 3/4"	2 1/2"	Black on Orange	25/bag
13BY	2 7/8"	1 3/4"	2 1/2"	Yellow on Black	25/bag

Underground Cable and Pipeline Markers  
Also Available  
Call Your Teltek Inside Sales Coordinator  
For Specifications



Return to Index

Markers